# Capsule Slip Ring LPC 12F

This unit can be used in any electromechanical system that requires unrestrained, continuous rotation while transferring power or data from a stationary to a rotating structure.

The LPC-12F capsule slip ring is a standard, off-the-shelf unit that uses gold contacts at the rotary interface. Color-coded lead wires are used on both the stator and rotor for simplifying electrical connections.

Using a 90° V-groove ring design for each ring, the LPC-12F provides smoother running, lower torque and lower electrical noise than competitive slip rings. It is available in 6, 12 circuit models.



Specifications					
Operating Speed	0-300 rpm				
Number of Circuits	12				
Voltage	240 VAC/DC				
Current Rating	2 amps per circuit				
Temperature Range	-20C to +60C -				
Contact Material	Gold to Gold				
Lead Size	28# silver plated copper				
Lead Length	Standard 250 mm (9.843inch)				
Dielectric Strength	≥500 VAC @50Hz, between each circuit				
Insulation Resistance	100 MΩ @ 500 VDC				
Electrical Noise	<b>1</b> mΩMin				

Capsule Length							
# of Circuits	L (mm)	Part No					
12	26.43	LPC-12F					

- The operating life of the unit depends upon temperature, rotation speed and environment.
- The operating life ≥50,000,000 runs ref.

### **Features**











✓ 2 amps per circuit, 240 VAC/VDC

**☑** Speeds up to 300 rpm continuous, Gold-Gold contacts

Compatible with data bus protocols

**▼** Sealed units are available

**▼** Flexible, color-coded, silver-plated lead wires

✓ Also available with 5 and 10 amps power rings combined with 2 amps rings

Precision ball bearings meet or exceed life requirements



**TEMPERATURE RANGE** -20° C to 60° C



**MAXIMUM OPERATING SPEED** 0-300 RPM

### **Applications**


- **▼** Electrical test equipment
- ✓ Manufacturing and process control equipment
- ✓ Indexing tables
- **▼** CTV pan / tilt camera mounts
- **▼** Robotics, rotary sensors
- ✓ Urgent illumination equipment
- Exhibit / display equipment
- **▼** Aviation ,military ,instrument, medical equipment.



sales@slipring.cn +1 346-320-9106



## **Advantage**



**▼** Compact design to fit in the most demanding space

**▼** Smooth running

✓ Low electrical noise

**▼** Prompt shipment per your urgent requirement

**✓** 360°continuous rotation

**▼** High bandwidth transfer capability

**✓** Addition of special components

▼ Transfers analog and digital signals

**☑** Gold-Gold contacts makes long life time

Wre Color Code										
Wire Size	Ring #	Color	Ring#	Color	Ring #	Color	Ring#	Color		
AWG28# silver plated copper Teflon UL	#1	BLK	#2	BRN	#3	RED	#4	ORG		
	#5	YEL	#6	GRN	#7	BLK-BLU	#8	PUR		
	#9	GRAY	#10	WIT	#11	PINK	#12	AZURY		
	#13	WIT/BLK	#14	WIT/BRN	#15	WIT/RED	#16	WIT/ORG		
	#17	WIT/YET	#18	WIT/GRN	#19	WIT/BLU	#20	WIT/PUR		
	#21	WIT/GRAY	#22	CLAR	#23	BLK-RED	#24	BLK/BRN		


Remarks: 1. AWG28# silver plated copper Teflon UL, 24 different color single wires for a circle

2. #1 from rotor side (The color if the wire can be changed).

Contact us on wire color codes

## **Drawings**

Model:LPC-12F

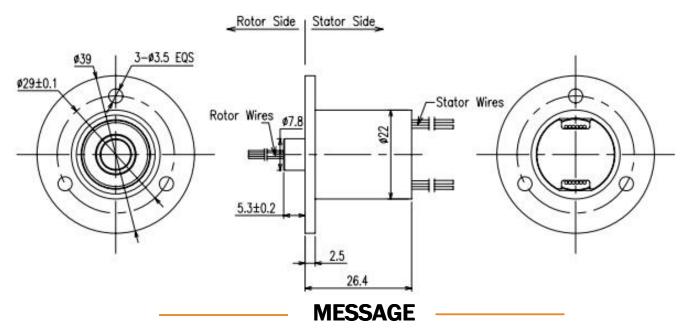

Any questions about slip ring, please leave your message to get a professional solution

### PRODUCT CATEGORY

**FORJ** 

Capsule slip ring
Through bore slip ring
Pancake slip ring
Mercury slip ring
Separate slip ring
Miniature slip ring
Wind turbine slip ring
Hydraulic slip ring
Pneumatic slip ring

Coaxial rotary joints

#### REQUESTS

Circuits
Current&voltage
Signal details
Dimension
Working speed
Working temperature
Operating
Environment
Other

### NDUSTRIES

Surveillance

Crane

Medical
Marine
Defence
Radar antenna
Automation
Meter and instrument
Wind turbine generator
VR Device
Other





+1 346-320-9106 sales@slipring.cn