Miniature Capsule Slip Ring LPM-06M

This unit can be used in any electromechanical system that requires unrestrained, continuous rotation while transferring power or data from a stationary to a rotating structure.

The LPM-06M miniature slip ring is a standard, off-the-shelf unit that uses gold contacts at the rotary interface. Color-coded lead wires are used on both the stator and rotor for simplifying electrical connections. The LPM-06M allows tremendous flexibility in dealing with system size restrictions. It is available in 4- 6 circuit configurations.



Specifications				
Operating Speed	0-300 rpm			
Number of Circuits	6			
Voltage	240 VAC/DC			
Current Rating	2 amps per circuit			
Temperature Range	-20°C to +60°C			
Contact Material	Gold to Gold			
Lead Size	30# silver plated copper			
Lead Length	Standard 250 mm (9.843inch)			
Dielectric Strength	≥500 VAC @50Hz, between each circuit			
Insulation Resistance	100 MΩ @ 500 VDC			
Electrical Noise	1mΩ Min			

Capsule Length						
# of Circuits	L (mm)	Part No				
6	18.2	LPM-06M				

+1 346-320-9106

The operating life of the unit depends upon temperature, rotation speed and environment.

The operating life ≥50,000,000 runs ref.

Features











- ✓ 6 circuits models
- ✓ 2 amps per circuit ,240VAC/DC
- ✓ Precision assembly to provide exceptional rotational life
- **☑** Speed up to 300 rpm continuous
- **✓** Gold-Gold contacts
- **▼** Flexible, color-coded, silver-plated, lead wires
- ✓ Superior handling of low level control signals
- **▼** Metal housing optional for most commercial applications



TEMPERATURE RANGE
-20° C to 60° C



MAXIMUM OPERATING SPEED

0-300 RPM

Applications


- ✓ Electrical test equipment
- **✓** Manufacturing and process control equipment
- ✓ Indexing tables
- ▼ CCTV pan / tilt camera mounts
- ▼ Robotics, rotary sensors, urgent illumination equipmen
- Exhibit / display equipment/Closed-circuit control
- **▼** Aviation ,military ,instrument, medical equipment.
- **▼** Min-type wire-rolling machine / Wind turbine generator




sales@slipring.cn



Advantage



▼ Compact design to fit in the most demanding space.



✓ Low electrical noise

▼ Quick shipment per your urgent requirement

✓ 360 continuous rotation

▼ High bandwidth transfer capability

✓ Addition of special components

✓ Quick shipment

Wre Color Code										
Wire Size	Ring #	Color	Ring#	Color	Ring #	Color	Ring#	Color		
AWG17# silver plated copper Teflon UL	#1	BLK	#2	BRN	#3	RED	#4	ORG		
	#5	YEL	#6	GRN	#7	BLK-BLU	#8	PUR		
	#9	GRAY	#10	WIT	#11	PINK	#12	AZURY		
	#13	WIT/BLK	#14	WIT/BRN	#15	WIT/RED	#16	WIT/ORG		
	#17	WIT/YET	#18	WIT/GRN	#19	WIT/BLU	#20	WIT/PUR		
	#21	WIT/GRAY	#22	CLAR	#23	BLK-RED	#24	BLK/BRN		


Remarks: 1. AWG28# silver plated copper Teflon UL, 24 different color single wires for a circle

2. #1 from rotor side (The color if the wire can be changed).

Contact us on wire color codes

Drawings

Model: LPM-06M

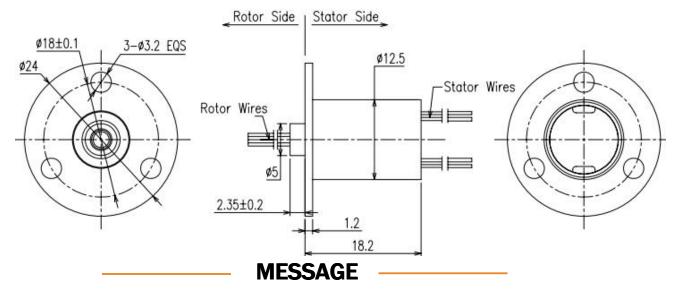

Any questions about slip ring, please leave your message to get a professional solution

FORJ Capsule slip ring Through bore slip ring Pancake slip ring Mercury slip ring Separate slip ring Miniature slip ring Wind turbine slip ring Hydraulic slip ring Pneumatic slip ring Coaxial rotary joints

Circuits Current&voltage Signal details Dimension Working speed Working temperature **Operating** Environment Other

Surveillance

Crane Medical Marine Defence Radar antenna **Automation** Meter and instrument Wind turbine generator **VR** Device Other





sales@slipring.cn +1 346-320-9106