

Miniature Capsule Slip Ring LPM-12B

This unit can be used in any electromechanical system that requires unrestrained, continuous rotation while transferring power or data from a stationary to a rotating structure. It is also called a rotary electrical interface, commutator, collector, swivel or an electrical rotary joint.

The LPM-12B miniature slip ring is a standard, off-the-shelf unit that uses gold contacts at the rotary interface. Color-coded lead wires are used on both the stator and rotor for simplifying electrical connections. The LPM-12B allows tremendous flexibility in dealing with system size restrictions. It is available in 4, 6 and 12 circuit configurations.



 The operating life ≥50,000,000 runs ref. Features 				
Design	\otimes	Slip	<!--</td-->	
	Custom	Ring	> > >	

TEMPE -20° C to 60° C

Applications

- **Electrical test equipment**
- Manufacturing and process control equipment
- Indexing tables
- **CCTV** pan / tilt camera mounts
- **Robotics**, rotary sensors, urgent illumination equipmen
- **Exhibit** / display equipment/Closed-circuit control
- Aviation , military , instrument, medical equipment.
- Min-type wire-rolling machine / Wind turbine generator

Specifications

Operating Speed	0-300 rpm
Number of Circuits	12
Voltage	240 VAC/DC
Current Rating	2 amps per circuit
Temperature Range	-20℃ to +60℃
Contact Material	Gold to Gold
Lead Size	30# silver plated copper
Lead Length	Standard 250 mm (9.843inch)
Dielectric Strength	≥500 VAC @50Hz, between each circuit
Insulation Resistance	100 MΩ @ 500 VDC
Electrical Noise	1mΩ Min

Capsule Length							
# of Circuits	L (mm)	Part No					
12	25.3	LPM-12B					



The operating life of the unit depends upon temperature, rotation speed and environment.

- **12** circuits models
- 2 amps per circuit ,240VAC/DC
- Precision assembly to provide exceptional rotational life
- Speed up to 300 rpm continuous
- **Gold-Gold contacts**
- Flexible, color-coded, silver-plated, lead wires
- Superior handling of low level control signals
- Metal housing optional



MAXIMUM OPERATING SPEED 0-300 RPM





www.slipring.cn

Drawings





- **V** Low torque minimize system torque budget
- Compact design to fit in the most demanding space.

JINPAT


- Smooth running
- ✓ Low electrical noise
- **V** Quick shipment per your urgent requirement
- **360** continuous rotation
- **W** High bandwidth transfer capability
- Addition of special components
- **Quick shipment**

				/re Coloi					
	Wire Size	Ring #	Color	Ring #	Color	Ring #	Color	Ring #	Color
	AWG17# silver plated copper Teflon UL	#1	BLK	#2	BRN	#3	RED	#4	ORG
		#5	YEL	#6	GRN	#7	BLK-BLU	#8	PUR
		#9	GRAY	#10	WIT	#11	PINK	#12	AZURY
		#13	WIT/BLK	#14	WIT/BRN	#15	WIT/RED	#16	WIT/ORG
		#17	WIT/YET	#18	WIT/GRN	#19	WIT/BLU	#20	WIT/PUR
		#21	WIT/GRAY	#22	CLAR	#23	BLK-RED	#24	BLK/BRN

Remarks: 1. AWG28# silver plated copper Teflon UL, 24 different color single wires for a circle

2. #1 from rotor side (The color if the wire can be changed).

Contact us on wire color codes

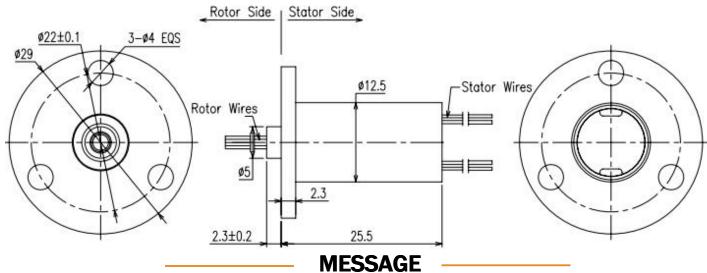

Any questions about slip ring, please leave your message to get a professional solution

D						D

Circuits Signal details Dimension Operating Environment Other



+1 346-320-9106



Model: LPM-12B

- Current&voltage
- Working speed
- Working temperature

Surveillance Crane Medical Marine Defence Radar antenna **Automation** Meter and instrument Wind turbine generator **VR** Device Other

