**Operating Speed** 

Number of Circuits

Voltage

Current Rating

**Temperature Range** 

**Contact Material** 

Lead Size

Lead Length

**Dielectric Strength** 


**Electrical Noise** 

Insulation Resistance

### Miniature Capsule Slip Ring LPM-12D

This unit can be used in any electromechanical system that requires unrestrained, continuous rotation while transferring power or data from a stationary to a rotating structure. It is also called a rotary electrical interface, commutator, collector, swivel or an electrical rotary joint. It can improve electromechanical capability, simplify system design, eliminate possible damage while rotation.

The LPM-12D miniature slip ring is a standard, off-the-shelf unit that uses gold contacts at the rotary interface. Color-coded lead wires are used on both the stator and rotor for simplifying electrical connections. The LPM-12D allows tremendous flexibility in dealing with system size restrictions. It is available in 4, 6 and 12 circuit configurations.

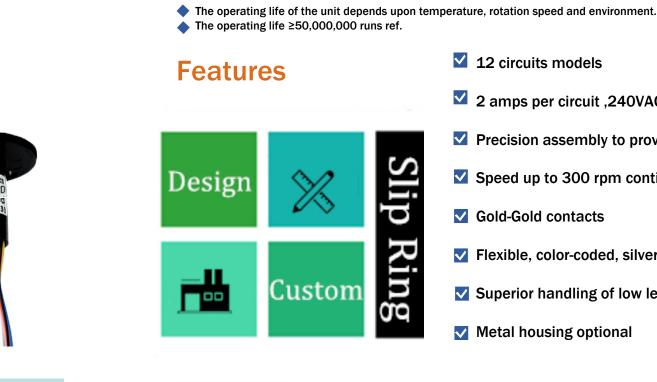

# TEMPE -20° C to 60° C

## **Applications**

- **Electrical test equipment**
- Manufacturing and process control equipment
- Indexing tables
- CCTV pan / tilt camera mounts
- **Robotics**, rotary sensors, urgent illumination equipmen
- **Exhibit** / display equipment/Closed-circuit control
- Aviation , military , instrument, medical equipment.
- Min-type wire-rolling machine / Wind turbine generator

0-300 rpm
12
240 VAC/DC

**Specifications** 

Gold to Gold

-20℃ to +60℃

30# silver plated copper

2 amps per circuit

Standard 250 mm (9.843inch)

≥500 VAC @50Hz, between each circuit

100 MΩ @ 500 VDC

1mΩ Min

Capsule Length			
# of Circuits	L (mm)	Part No	
12	25.5	LPM-12D	



- ✓ 12 circuits models
- **2** amps per circuit ,240VAC/DC
- Precision assembly to provide exceptional rotational life
- Speed up to 300 rpm continuous
- Gold-Gold contacts
- Flexible, color-coded, silver-plated, lead wires
- Superior handling of low level control signals
- Metal housing optional



MAXIMUM OPERATING SPEED 0-300 RPM





### www.slipring.cn

### Drawings

# **Advantage**



Wire Size

- **V** Low torque minimize system torque budget
- Compact design to fit in the most demanding space.

JINPAT

- Smooth running
- ✓ Low electrical noise
- **V** Quick shipment per your urgent requirement
- **360** continuous rotation
- **W** High bandwidth transfer capability
- **Addition of special components**
- **Quick shipment**

<u>ø19±0.1</u>	4-ø3.1 EQS	
<u>\$24.2</u>	¥	ø5 ø12.
(iX)	Rotor Wires	
<del> </del> <b>\$</b> -{-C		<u>t</u>
11	2.3±0.2	
( t	2.510.2	**
	·	MESS

Any questions about slip ring, please leave your message to get a professional solution

		EG	OR

FORJ

(

Capsule slip ring	
Through bore slip ring	
Pancake slip ring	
Mercury slip ring	
Separate slip ring	
Viniature slip ring	
Wind turbine slip ring	
Hydraulic slip ring	
Pneumatic slip ring	
Coaxial rotary joints	

Circuits Signal details Dimension Working speed Operating Environment Other

### AWG17# silver plated copper #1 BLK #2 BRN #3 RED #4 Teflon UL #5 YEL #6 GRN #7 BLK-BLU #8 #10 #9 GRAY WIT #11 PINK #12 #13 WIT/BLK #14 WIT/BRN #15 WIT/RED #16 WIT/ORG #17 WIT/YET #18 WIT/GRN #19 WIT/BLU #20 WIT/PUR #21 WIT/GRAY #22 CLAR #23 **BLK-RED** #24 BLK/BRN

Ring #

Color

Ring #

Color

Ring #

Color

ORG

PUR

AZURY

Color

Remarks: 1. AWG28# silver plated copper Teflon UL, 24 different color single wires for a circle

2. #1 from rotor side (The color if the wire can be changed).


Ring #

**Contact us on wire color codes** 





# Model: LPM-12D

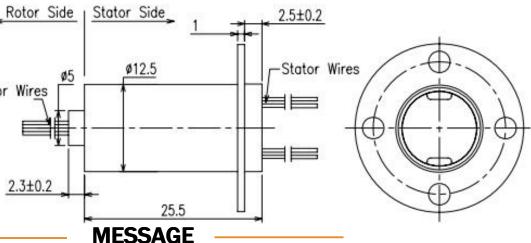

- Current&voltage
- Working temperature

Surveillance Crane **Medical** Marine Defence Radar antenna **Automation** Meter and instrument Wind turbine generator **VR** Device Other

