

Capsule Slip Ring LPC 12C

This unit can be used in any electromechanical system that requires unrestrained, continuous rotation while transferring power or data from a stationary to a rotating structure. The LPC-12C capsule slip ring is a standard, off-the-shelf unit that uses gold contacts at the rotary interface. Color-coded lead wires are used on both the stator and rotor for simplifying electrical connections.

Using a 90° V-groove ring design for each ring, the LPC-12C provides smoother running, lower torque and lower electrical noise than competitive slip rings. It is available in 6, 12 circuits model.

A comment	

The operating life of the unit depends upon temperature, rotation speed and environment. The operating life ≥50,000,000 runs ref.





TEMPERATURE RANGE -20° C to 60° C

Applications

- **Electrical test equipment**
- Manufacturing and process control equipment
- ✓ Indexing tables
- **CTV** pan / tilt camera mounts
- **Robotics**, rotary sensors
- **V** Urgent illumination equipment
- **Exhibit** / display equipment
- Aviation , military , instrument, medical equipment.

	Specifications
Operating Speed	0-300 rpm
Number of Circuits	12
Voltage	240 VAC/DC
Current Rating	2 amps per circuit
Temperature Range	-20C to +60C -
Contact Material	Gold to Gold
Lead Size	28# silver plated copper
Lead Length	Standard 250 mm (9.843inch)
Dielectric Strength	≥500 VAC @50Hz, between each circuit
Insulation Resistance	100 MΩ @ 500 VDC
Electrical Noise	1mΩMin

Capsule Length						
# of Circuits	L (mm)	Part No				
12	26.38	LPC-12C				



- ✓ 12 circuits models
- **2** amps per circuit, 240 VAC/VDC
- Gold-Gold contacts, Speeds up to 300 rpm continuous
- **Compatible with data bus protocols**
- Sealed units are available
- Flexible, color-coded, silver-plated lead wires
- ✓ Transfers analog and digital signal
- Precision ball bearings meet or exceed life requirements for most commercial applications



MAXIMUM OPERATING SPEED 0-300 RPM



www.slipring.cn

Advantage



- **V** Low torque minimizes system torque budget
- Compact design to fit in the most demanding space

HNPAT


- Smooth running
- ✓ Low electrical noise
- **V** Prompt shipment per your urgent requirement
- **360° continuous rotation**
- **W** High bandwidth transfer capability
- **Addition of special components**
- **V** Transfers analog and digital signals
- Gold-Gold contacts makes long life time

Wre Color Code									
Wire Size	Ring #	Color	Ring #	Color	Ring #	Color	Ring #	Color	
AWG28# silver plated copper Teflon UL	#1	BLK	#2	BRN	#3	RED	#4	ORG	
	#5	YEL	#6	GRN	#7	BLK-BLU	#8	PUR	
	#9	GRAY	#10	WIT	#11	PINK	#12	AZURY	
	#13	WIT/BLK	#14	WIT/BRN	#15	WIT/RED	#16	WIT/ORG	
	#17	WIT/YET	#18	WIT/GRN	#19	WIT/BLU	#20	WIT/PUR	
	#21	WIT/GRAY	#22	CLAR	#23	BLK-RED	#24	BLK/BRN	

Remarks: 1. AWG28# silver plated copper Teflon UL, 24 different color single wires for a circle

2. #1 from rotor side (The color if the wire can be changed).

Contact us on wire color codes

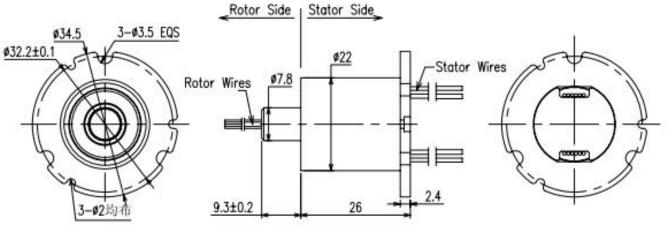

Any questions about slip ring, please leave your message to get a professional solution

Drawings

FORJ Capsule slip ring Through bore slip ring Pancake slip ring Mercury slip ring Separate slip ring Miniature slip ring Wind turbine slip ring Hydraulic slip ring Pneumatic slip ring Coaxial rotary joints

Circuits Signal details Dimension Operating Environment Other





Model:LPC-12C

MESSAGE

- Current&voltage
- Working speed
- Working temperature

Surveillance Crane **Medical** Marine Defence Radar antenna **Automation** Meter and instrument Wind turbine generator **VR** Device Other

