

## Capsule Slip Ring LPC-12B

This unit can be used in any electromechanical system that requires unrestrained, continuous rotation while transferring power or data from a stationary to a rotating structure. It is also called a rotary electrical interface, commutator, collector, swivel or an electrical rotary joint.

Using a 90° V-groove ring design for each ring, the LPC-12B provides smoother running, lower torque and lower electrical noise than competitive slip rings. It is available in 6, 12 circuit modes.



### Specifications


Operating Speed	0-300 rpm
Number of Circuits	12
Voltage	240 VAC/DC
Current Rating	2 amps per circuit
Temperature Range	-20C to +60C -
Contact Material	Gold to Gold
Lead Size	28# silver plated copper
Lead Length	Standard 250 mm (9.843inch)
Dielectric Strength	≥500 VAC @50Hz, between each circuit
Insulation Resistance	100 MΩ @ 500 VDC
Electrical Noise	1mΩMin

### Capsule Length

# of Circuits	L (mm)	Part No
12	26.43	LPC-12B

- ◆ The operating life of the unit depends upon temperature, rotation speed and environment.
- ◆ The operating life ≥50,000,000 runs ref.

## Features

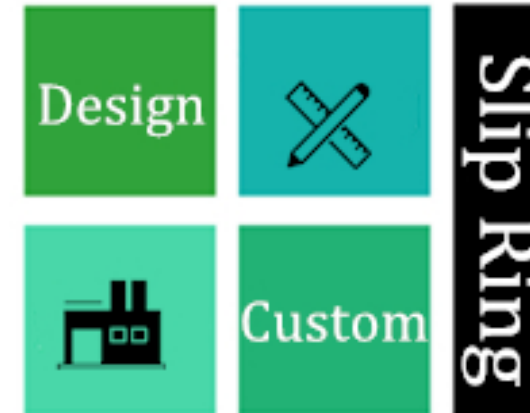

- ✓ 12 circuits models
- ✓ 2 amps, 240 VAC/VDC per circuit
- ✓ Gold-Gold contacts, Speeds up to 300 rpm continuous
- ✓ Compatible with data bus protocols
- ✓ Sealed units are available
- ✓ Flexible, color-coded, silver-plated lead wires
- ✓ Also available at 5A and 10A power rings combined with 2 amps rings.
- ✓ Precision ball bearings meet or exceed life requirements for most commercial applications



TEMPERATURE RANGE  
-20° C to 60° C



MAXIMUM OPERATING SPEED  
0-300 RPM

## Applications

- ✓ Electrical test equipment
- ✓ Manufacturing and process control equipment
- ✓ Indexing tables
- ✓ CTV pan / tilt camera mounts
- ✓ Robotics, rotary sensors
- ✓ Urgent illumination equipment
- ✓ Exhibit / display equipment
- ✓ Aviation ,military ,instrument, medical equipment.



## Advantage



- ✓ Low torque minimizes system torque budget
- ✓ Compact design to fit in the most demanding space
- ✓ Smooth running
- ✓ Low electrical noise
- ✓ Prompt shipment per your urgent requirement
- ✓ 360°continuous rotation
- ✓ High bandwidth transfer capability
- ✓ Addition of special components
- ✓ Transfers analog and digital signals
- ✓ Gold-Gold contacts makes long life time

### Wire Color Code

Wire Size	Ring #	Color	Ring #	Color	Ring #	Color	Ring #	Color
AWG28# silver plated copper Teflon UL	#1	BLK	#2	BRN	#3	RED	#4	ORG
	#5	YEL	#6	GRN	#7	BLK-BLU	#8	PUR
	#9	GRAY	#10	WIT	#11	PINK	#12	AZURY
	#13	WIT/BLK	#14	WIT/BRN	#15	WIT/RED	#16	WIT/ORG
	#17	WIT/YET	#18	WIT/GRN	#19	WIT/BLU	#20	WIT/PUR
	#21	WIT/GRAY	#22	CLAR	#23	BLK-RED	#24	BLK/BRN


Remarks: 1. AWG28# silver plated copper Teflon UL, 24 different color single wires for a circle

2. #1 from rotor side (The color if the wire can be changed).

Contact us on wire color codes

## Drawings

Model:LPC-12B

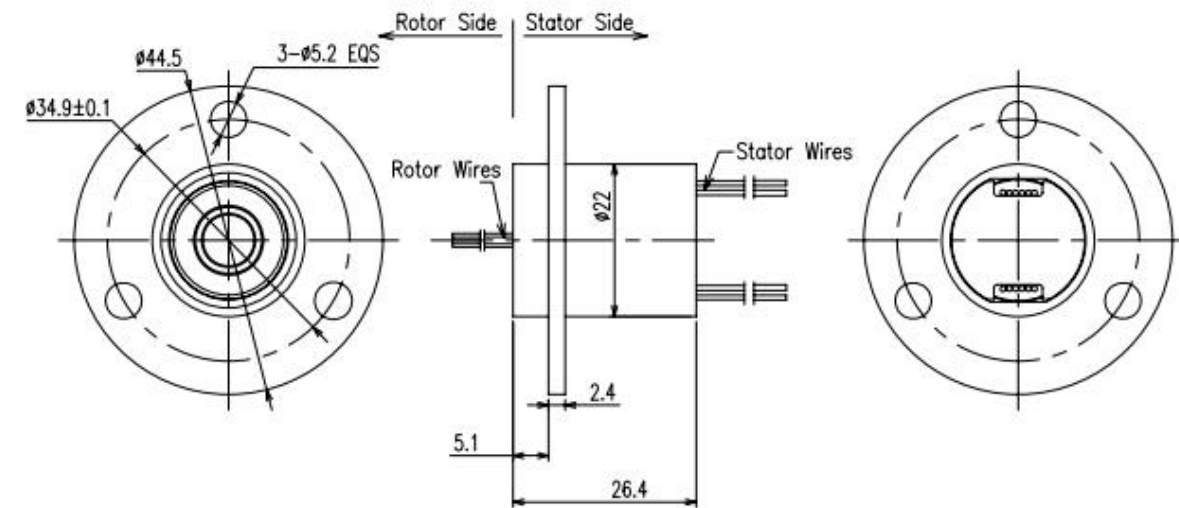

### MESSAGE

Any questions about slip ring, please leave your message to get a professional solution

#### PRODUCT CATEGORY

FORJ  
Capsule slip ring  
Through bore slip ring  
Pancake slip ring  
Mercury slip ring  
Separate slip ring  
Miniature slip ring  
Wind turbine slip ring  
Hydraulic slip ring  
Pneumatic slip ring  
Coaxial rotary joints

#### REQUESTS

Circuits  
Current&voltage  
Signal details  
Dimension  
Working speed  
Working temperature  
Operating  
Environment  
Other

#### INDUSTRIES

Surveillance  
Crane  
Medical  
Marine  
Defence  
Radar antenna  
Automation  
Meter and instrument  
Wind turbine generator  
VR Device  
Other



Send