## **Temperature Sensor**

## FXDD004

Part Number



- FDA compliant
- Response time T90: < 2 seconds
- Robust stainless steel housing with IP69K
- Temperature measuring range: -50 ... +200° C


## **Technical Data**

Sensor-specific data	
Sensor element	PT100, Class B
Temperature Measurement Range	-50200 °C
Medium	Liquids, gases
Response Time	<2s
Environmental conditions	
Temperature of medium	-50200 °C
Ambient temperature	-2580 °C
Storage temperature	-2580 °C
Mechanical Strength	100 bar
Shock Resistance	IEC 60751
Vibration resistance	IEC 60751
Mechanical Data	
Housing Material	1.4404
Material in contact with media	1.4404
Degree of Protection	IP68/IP69K *
Connection	M12 × 1; 4-pin
Process Connection	Sealing cone M18 × 1.5
Process Connection Length (PCL)	64 mm
Probe Length (PL)	32 mm
PT100	•
Connection Diagram No.	140
Suitable Connection Technology No.	21
Suitable Mounting Technology No.	900 901

weFlux<sup>2</sup> InoxSens

\* Tested by wenglor


weFlux² Temperature Sensors ensure precise temperature measurement of liquids and gases in closed piping systems. It's easy to incorporate the standardized PT100/PT1000 resistance value into the controller. The compact housing with a diameter of just 27 mm is made of V4A stainless steel and features an easy-to-clean surface. Thanks to their rugged housing and functional design, the Temperature Sensors are FDA compliant.




## **Complementary Products**

ZH6C00x adapter to G1/4"



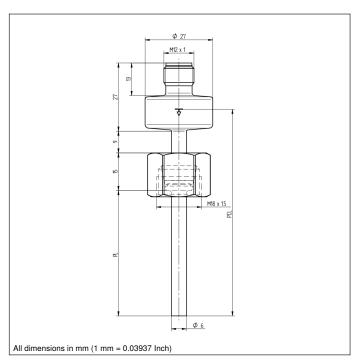



_egen	nd		PT	Platinum measuring resistor	ENA	Encoder A	
+	Supply Voltage +		nc	not connected	ENB	Encoder B	
-	Supply Voltage 0 V		U	Test Input	Amin	Digital output MIN	
~	Supply Voltage (AC Voltage)		Ū	Test Input inverted	Амах	Digital output MAX	
Α	Switching Output (N	IO)	W	Trigger Input	Аок	Digital output OK	
Ā	Switching Output (N	IC)	0	Analog Output	SY In	Synchronization In	
٧		IO)	0-	Ground for the Analog Output	SY OUT	Synchronization OUT	
V	Contamination/Error Output (N	IC)	BZ	Block Discharge	OLT	Brightness output	
E	Input (analog or digital)		Awv	Valve Output	М	Maintenance	
Т	Teach Input		а	Valve Control Output +			
Z	Time Delay (activation)		b	Valve Control Output 0 V			
S	Shielding		SY	Synchronization	Wire Colors according to		
RxD	nterface Receive Path		E+	Receiver-Line	DIN IE	DIN IEC 757	
TxD	Interface Send Path		S+	Emitter-Line	BK	Black	
RDY	Ready		±	Grounding	BN	Brown	
GND	Ground		SnR	Switching Distance Reduction	RD	Red	
CL	Clock		Rx+/-	Ethernet Receive Path	OG	Orange	
E/A	Output/Input programmable		Tx+/-	Ethernet Send Path	YE	Yellow	
0	IO-Link		Bus	Interfaces-Bus A(+)/B(-)	GN	Green	
PoF	Power over Ethernet		La	Emitted Light disengageable	BU	Blue	
IN	Safety Input		Mag	Magnet activation	VT	Violet	
OSSD	Safety Output		RES	Input confirmation	GY	Grey	
	Signal Output		EDM	Contactor Monitoring	WH	White	
	Ethernet Gigabit bidirect. data lir	ne (A-D)		Encoder A/Ā (TTL)	PK	Pink	
	Encoder 0-pulse 0-0 (TTL)			Encoder B/B (TTL)	GNYE	Green/Yellow	











