## Temperature Sensor with IO-Link

## FXTT016

Part Number

weFlux<sup>2</sup> InoxSens



- FDA compliant
- Ready for Industry 4.0 with IO-Link 1.1
- Response time T90: < 2 seconds
- Temperature measuring range: -50 ... +150° C

weFlux² Temperature Sensors ensure precise temperature measurement of liquids and gases in closed piping systems. Either 2 switching outputs, 1 switching output and 1 analog output or one 2-wire analog output is available depending on settings and connection configuration. The outputs can be configured as desired via IO-Link in order to flexibly adapt the sensors to the respective application.



## **Technical Data**

i ecililicai Dala				
Sensor-specific data				
Temperature Measurement Range	-50150 °C			
Adjustable Range	-50150 °C			
Medium	Liquids, gases			
Measuring error	± 0,5 °C			
Resolution	0,01 °C			
Response Time	< 2 s			
Environmental conditions				
Temperature of medium	-50150 °C			
Ambient temperature	-2580 °C			
Storage temperature	-2580 °C			
Mechanical Strength	40 bar			
EMC	DIN EN 61326-1			
Shock Resistance	IEC 60751			
Vibration resistance	IEC 60751			
Electrical Data				
2-wire supply power	1232 V DC			
3-wire supply power	1232 V DC			
Current Consumption (Ub = 24 V)	< 15 mA			
Switching Outputs	2			
Switching Output/Switching Current	± 100 mA			
Switching Output Voltage Drop	< 1,5 V DC			
Analog Output	010 V/420 mA			
Current Output Load Resistance	(Ub-Ubmin)/0,02A			
Short Circuit Protection	yes			
Reverse Polarity Protection	yes			
Protection Class	III			
Interface	IO-Link V1.1			
Mechanical Data				
Setting Method	IO-Link			
Housing Material	1.4404			
Material in contact with media	1.4404			
Degree of Protection	IP68/IP69K *			
Connection	M12 × 1; 4-pin			
Process Connection	Dairy pipe DN40			
Process Connection Length (PCL)	54 mm			
Probe Length (PL)	36 mm			
Analog Output				
Configurable as PNP/NPN/Push-Pull				
Switchable to NC/NO				
IO-Link				
	100			
Connection Diagram No.	139			
Suitable Connection Technology No.	21			


<sup>\*</sup> Tested by wenglor


## **Complementary Products**


IO-Link Master

wTeach2 software DNNF005



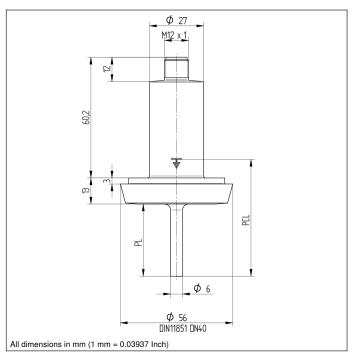





Legend		PT	Platinum measuring resistor	ENA	Encoder A	
+	Supply Voltage +	nc	not connected	ENB	Encoder B	
-	Supply Voltage 0 V	U	Test Input	Amin	Digital output MIN	
~	Supply Voltage (AC Voltage)	Ū	Test Input inverted	Амах	Digital output MAX	
Α	Switching Output (NO)	W	Trigger Input	Аок	Digital output OK	
Ā	Switching Output (NC)	0	Analog Output	SY In	Synchronization In	
V	Contamination/Error Output (NO)	0-	Ground for the Analog Output	SY OUT	Synchronization OUT	
V	Contamination/Error Output (NC)	BZ	Block Discharge	OLT	Brightness output	
E	Input (analog or digital)	Awv	Valve Output	М	Maintenance	
Т	Teach Input	а	Valve Control Output +			
Z	Time Delay (activation)	b	Valve Control Output 0 V			
S	Shielding		Synchronization		Wire Colors according to	
RxD	nterface Receive Path		Receiver-Line	DIN IEC 757		
TxD	Interface Send Path	S+	Emitter-Line	BK	Black	
RDY	Ready	±	Grounding	BN	Brown	
GND	Ground	SnR	Switching Distance Reduction	RD	Red	
CL	Clock	Rx+/-	Ethernet Receive Path	OG	Orange	
E/A	Output/Input programmable	Tx+/-	Ethernet Send Path	YE	Yellow	
•	IO-Link	Bus	Interfaces-Bus A(+)/B(-)	GN	Green	
PoE	Power over Ethernet	La	Emitted Light disengageable	BU	Blue	
IN	Safety Input	Mag	Magnet activation	VT	Violet	
OSSD	Safety Output	RES	Input confirmation	GY	Grey	
Signal	Signal Output	EDM	Contactor Monitoring	WH	White	
BI_D+/-	Ethernet Gigabit bidirect. data line (A-D)	ENARS422	Encoder A/Ā (TTL)	PK	Pink	
ENors42	Encoder 0-pulse 0-0 (TTL)	ENBR5422	Encoder B/B (TTL)	GNYE	Green/Yellow	













